

DATE	SYM	REVISION RECORD	AUTH	DR

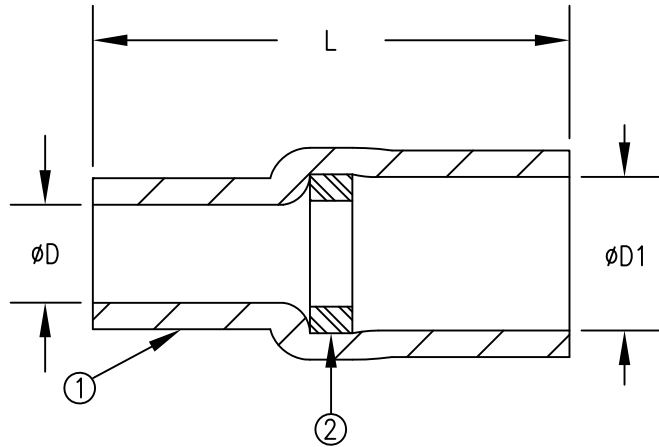


TABLE I: PRODUCT DETAILS

SUMITOMO PART NUMBER	L $\pm .015$	ϕD MINIMUM	$\phi D1$ MINIMUM
E-C-249-8	.180	.037	.058

MATERIALS:

- ① INSULATION SLEEVE:
HEAT-SHRINKABLE, RADIATION CROSSLINKED, MODIFIED POLYVINYLIDENE FLUORIDE.
COLOR = TRANSPARENT BLUE.
- ② SOLDER PREFORM:
ALLOY - Bi58 EUTECTIC AT 138°C. PER ANSI-J-STD-006.
FLUX - ROL1 TYPE RMA FLUX FOR SILVER OR TIN APPLICATIONS. PER ANSI-J-STD-004.

NOTES:

- 1. PLEASE REFER TO THE SUMITOMO ELECTRIC STS INSTALLATION GUIDE FOR RECOMMENDED ASSEMBLY INFORMATION.
- 2. TEMPERATURE RANGE: -55°C TO +125°C.



DIMENSIONS ARE IN INCHES TOLERANCES: (EXCEPT AS NOTED)				
LINEAR	ANGULAR			
0.0 = N/A	0° = N/A			
0.00 = N/A	0°0' = N/A			
0.000 = N/A	0°00' = N/A			
An STS PRODUCT			TITLE: SOLDER TERMINATION SLEEVE	
DRAWN	S. MELCHER	11-14-07	DRAWING NUMBER: E-C-249-8	
APPROVED	<i>Jon M. Mills</i>	11-14-07	REV -	
OTHER REF.	ORIG. DATE	11-14-07	SCALE: NONE	CAD NO. E-C-249-8
			SHEET	1 OF 1