


DATE	SYM	REVISION RECORD	AUTH	DR	CK

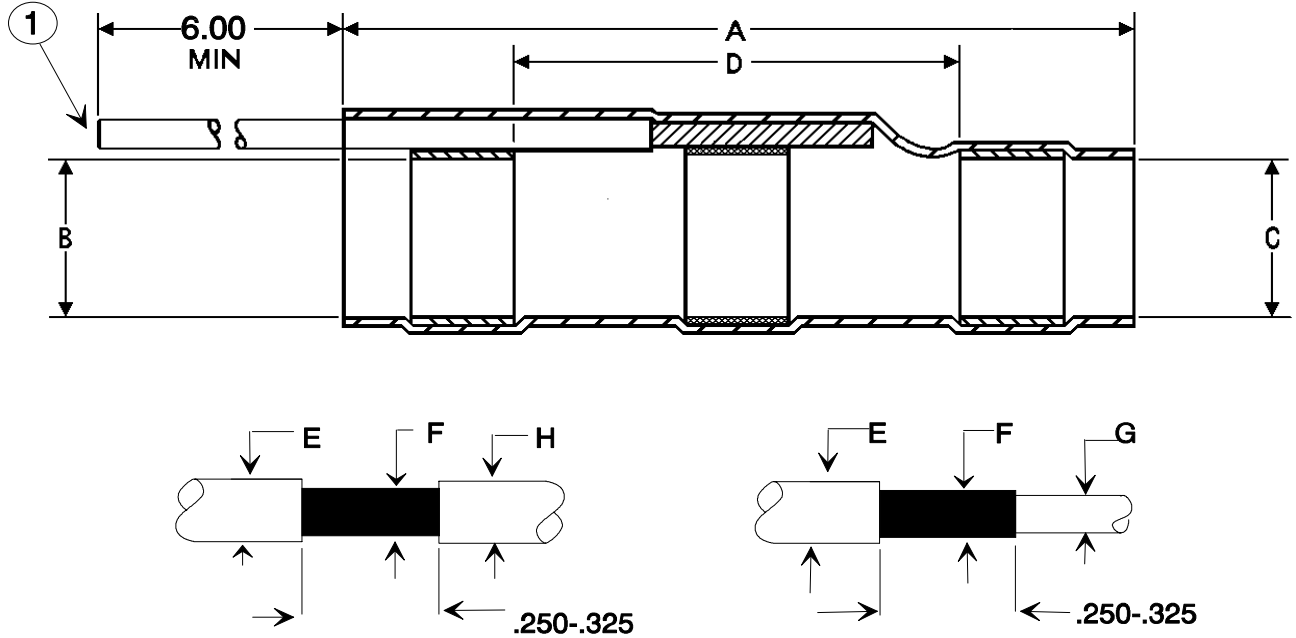


CABLE DIAMETER RANGE AND PREPARATION MEASUREMENTS
TABLE I. Construction details

SAE Part #	Marking Code	Sumitomo Part #	A ±.07	B MIN	C MIN	D MIN	E MAX	F MIN	G MIN	H MAX
AS83519/2-6	S0206S	H-ML-6	.650	.075	.105	.325	.105	.035	.020	.075
AS83519/2-7	S0207S	H-ML-7	.650	.105	.145	.325	.145	.055	.030	.105
AS83519/2-8	S0208S	H-ML-8	.650	.170	.200	.325	.200	.085	.050	.170
AS83519/2-9	S0209S	H-ML-9	.750	.235	.255	.325	.255	.130	.070	.235
AS83519/2-10	S0210S	H-ML-10	.750	.275	.300	.325	.300	.170	.100	.275

1/ Dimensions are in inches.

Notes: These dimensions are for both Class I and Class II.

1. Pre-installed wire lead per: MIL-W-22759/32-22-90
2. Class II Marking Code omits "SO" prefix.

TOLERANCES (except as noted)		 SUMITOMO ELECTRIC Interconnect Products, Inc.	
Decimal +		Scale N/A	Drawn By RW
Fractional +		Approved By	
Angular ±	Title: Shield terminator, environment resistant solder style, in accordance with SAE-AS83519/2		
	Rev. Date	Drawing Number SAE-AS83519/2 (6 THRU 10)	